


INSPECTION DOOR ALURAPID EI30, EI90

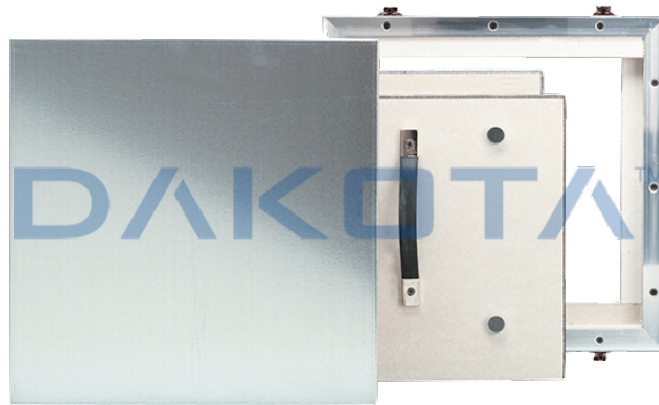

Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
------	------------------------	------------	-------	--------	--------------

GAN01-6520	AluRapid EI30 with fire flame retardant bulkhead	300 x 300 mm	0	15	PZ
GAN01-6522	AluRapid EI30 with fire flame retardant bulkhead	400 x 400 mm	0	12	PZ
GAN01-6524	AluRapid EI30 with fire flame retardant bulkhead	500 x 500 mm	0	9	PZ
GAN01-6526	AluRapid EI30 with fire flame retardant bulkhead	600 x 600 mm	0	7	PZ
GAN01-6528	AluRapid EI30 with fire flame retardant bulkhead	600 x 800 mm	0	8	PZ
GAN01-6530	AluRapid EI30 with fire flame retardant bulkhead	600 x 1.000 mm	0	8	PZ
GAN01-6540	AluRapid F30/EI30 with fire flame retardant bulkhe...	300 x 300 mm	0	15	0
GAN01-6542	AluRapid F30/EI30 with fire flame retardant bulkhe...	400 x 400 mm	0	12	0
GAN01-6544	AluRapid F30/EI30 with fire flame retardant bulkhe...	500 x 500 mm	0	9	0
GAN01-6546	AluRapid F30/EI30 with fire flame retardant bulkhe...	600 x 600 mm	0	7	0
GAN01-6548	AluRapid F30/EI30 with fire flame retardant bulkhe...	600 x 800 mm	0	7	0
GAN01-6550	AluRapid F30/EI30 with fire flame retardant bulkhe...	600 x 1.000 mm	0	7	0
GAN01-6540F120			0	15	PZ
GAN01-6542F120		400 x 400 mm	0	12	PZ
GAN01-6544F120		500 x 500 mm	0	8	PZ
GAN01-6546F120		600 x 600 mm	0	7	PZ
GAN01-6548F120		600 x 800 mm	0	7	PZ
GAN01-6550F120		600 x 1.000 mm	0	7	PZ

Description

Fire resistant 30/90 minute inspection hatch (EI30 and EI90), with automatic fire closure and handle for ease of use. Easy and quick mounting both in key structural walls and others. Individually Packaged in boxes.

Material

Aluminum frame, plasterboard panel and fire resistant protection.

Use

Used in crawl spaces and walls with fire protection F30/EI30 and EI90 (E = aptitude to block or produce flames, vapors or hot gases on the expo- sed side; I = aptitude to reduce heat transmission.)

