


COUNTERSUNK HEAD DRILL BIT TIP SCREW FOR OUTDOOR USE

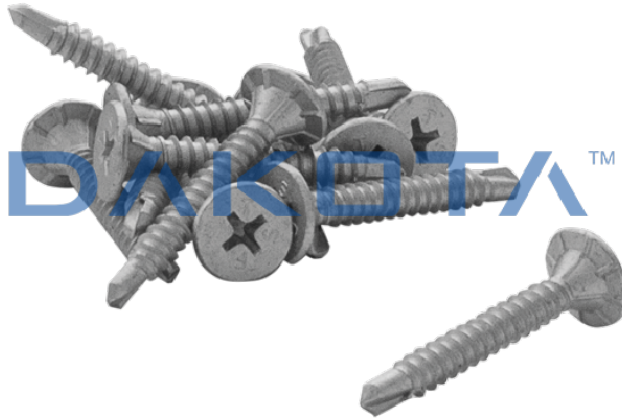

Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
MIN02-42025	Self-cutting phosphate buggle head screw for drywa...	4,2 x 25	500	0	CF
MIN02-42032	Self-cutting phosphate buggle head screw for drywa...	4,2 x 32	500	0	CF
MIN02-42038	Self-cutting phosphate buggle head screw for drywa...	4,2 x 38	250	0	CF
MIN02-42045	Self-cutting phosphate buggle head screw for drywa...	4,2 x 45	250	0	CF
MIN02-42055	Self-cutting phosphate buggle head screw for drywa...	4,2 x 55	250	0	0

Description

Screw for fixing fibrous, plasterboard and other similar panels on metal structures. Phillips H type flat head self tapping screw, made of cemented steel, special high-strength, salt coating finish (over 1.000 hours). No need of hole for metal support with thicknesses up to 3 mm (min 0.8 mm).

Material

Made of cemented steel, special coating.

Use

Use in outdoor areas. High corrosion resistance thanks to the salt coating finish. It can be used even in open spaces.