


### HATCH WITH VENTILATION SLOTS

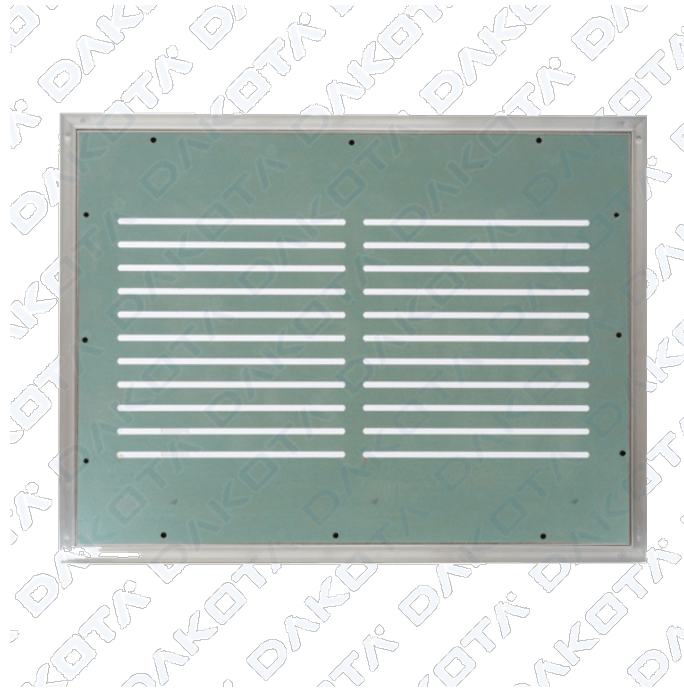

Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
GAN01-6355/X	Inspection door with ventilation slots	su misura			

#### Description

Inspection hatch with ventilation slots and with 12.5-mm-thick water-repellent plasterboard panel attached with exposed screws. The panel is fully releasable, has a concealed snap closure, and is complete with an anti-fall device. Used for suspended ceiling, walls and counter walls. False ceiling walls and counterwalls Moisture resistant Releasable panel

#### Material

Aluminum frame and hydrophobic plasterboard panel

#### Use

Perfect for performing thorough inspections of architectural elements such as walls, cavities and suspended ceilings, equipped with suitable openings to facilitate air flow and recirculation through ducting systems. The hatch frame will be placed directly inside the plasterboard construction, while the hatch will be mounted above the frame, configured to open outward from the architectural element.

