


CERTIFIED PLASTIC ANCHOR Ø 8 MM

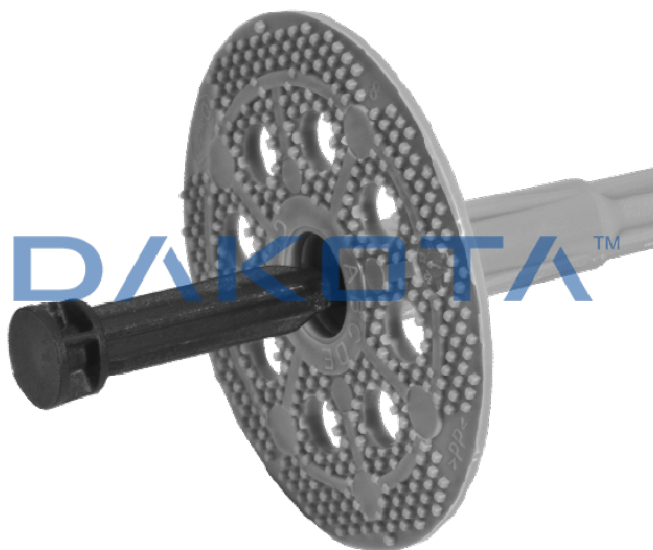

Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
TERII-2214N	Maximum anchoring 20	70 mm	500	20000	PZ
TERII-2216N	Maximum anchoring 40	90 mm	400	16000	PZ
TERII-2218N	Maximum anchoring 60	110 mm	350	14000	0
TERII-2216NB		ø 8 L 90	100	20000	0
TERII-2224N		180 mm	200	8000	0
TERII-2220N		130 mm	300	12000	0
TERII-2226N		240 mm	150	6000	0
TERII-2218NB		ø 8 L 110	100	16000	0

Description

Hammering anchor hole 8 mm, with head from 60 mm with improved adherence and green nylon expansion nail. It complies to ETAG014 and with certificate ETA06-0242 and subsequent extension.

Material

Made of PP (polypropylene), fiber glass/nylon nails.

Use

Used for the mechanical anchoring of the insulating panels for almost all types of masonry, supporting the load and any tear-off stress.

