


ANCHORS SGR-AV

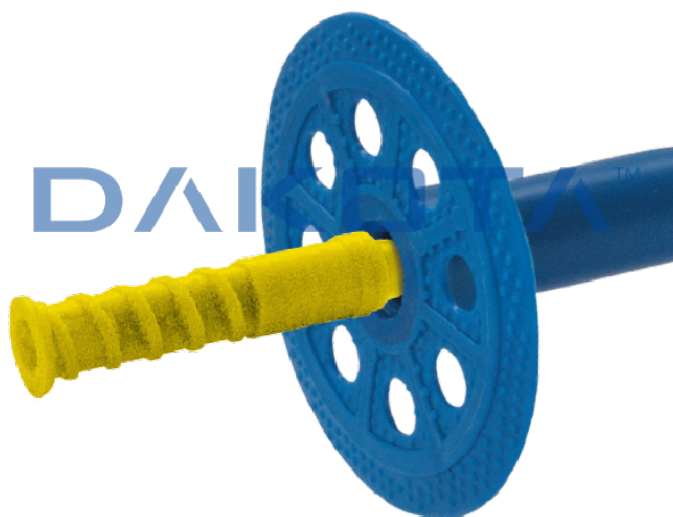

Code	Commercial Description	Dimensions	Conf.	Pallet	Selling Unit
TER11-3110AV	Anchor SGR-AV - 110 mm	110 mm	100	9000	PZ
TER11-3130AV	Anchor SGR-AV - 130 mm	130 mm	100	9000	PZ
TER11-3150AV	Anchor SGR-AV - 150 mm	150 mm	100	9000	PZ
TER11-3170AV	Anchor SGR-AV - 170 mm	170 mm	100	7200	PZ
TER11-3190AV	Anchor SGR-AV - 190 mm	190 mm	100	7200	PZ
TER11-3210AV	Anchor SGR-AV - 210 mm	210 mm	100	5400	PZ

TERII-3230AV	Anchor SGR-AV - 230 mm	230 mm	100	5400	PZ
TERII-3250AV	Anchor SGR-AV - 250 mm	250 mm	100	5400	PZ
TERII-3270AV	Anchor SGR-AV - 270 MM	270 mm	100	5400	PZ
TERII-3290AV	Anchor SGR-AV - 290 MM	290 mm	100	4500	PZ
TERII-3310AV	Anchor SGR-AV - 310 MM	310 mm	100	4500	PZ

Description

Hammering anchor hole 8 mm, with pre-assembled nail into the anchors body. Dimension of the head 60 mm with improved adherence and torx-ready coloured plastic nail cap. It complies to EAD 330196-01-0604. Main features of this product: Pre-assembled nail, for a faster installation. Variable section of the anchors body (fixing diameter 8 mm). Asymmetric expansion of the anchors body. Customizable anchors head. Packed in box of 100 pcs. each.

Material

Body and head made of PP (polypropylene), screw made of steel and nail cap in polyamide (PA).

Use

Used for the mechanical anchoring of insulating panels, mineral wool and for the main types of masonry, supporting its load and tensile stress. The pre-assembled nail facilitates and accelerates the installation of the anchor.

